

CORIO CD-1000FW Refrigerated / heating circulator

Refrigerated / heating circulators of the CORIO CD series distinguish themselves with a great price-to-performance ratio. Durable and dependable, they are suitable for a wide range of standard and routine work in both laboratories and industrial environments.


The CORIO CD-1000FW is a water-cooled model.

Product features

- Models for internal and external applications
- Bright, white, easy to read display
- Very quiet
- USB connection
- Integrated pump connection M16×1
- easy switching between internal and external circulation
- Bath lid and drain tap included
- Removable ventilation grid
- Refrigeration unit without side vents
- Class III (FL) according to DIN 12876-1
- Space-saving cooling coil design provides more usable space in the bath tank




Cool-down time

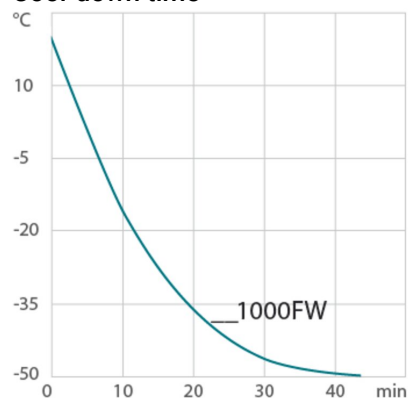


Medium: Ethanol

Heat-up time

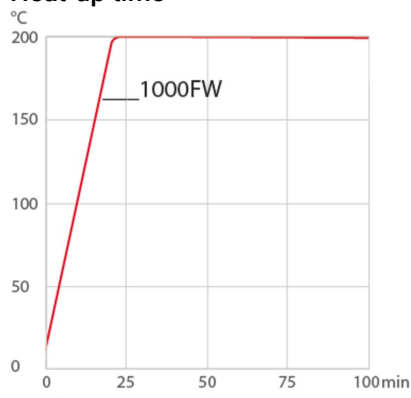

Medium: Thermal

Pump capacity

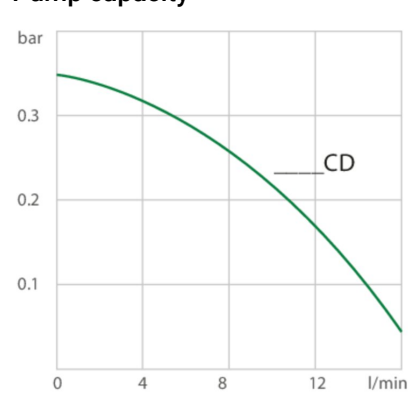

Medium: Water

Performance values

230V/50Hz (Schuko Plug - CEE 7/4 Plug Type F)

Heating capacity kW	2
Viscosity max. cSt	50
Pump capacity flow rate l/min	15
Pump capacity flow pressure psi	5.1
Power consumption A	14

Order No.	9012727.03						
Cooling capacity (Ethanol)							
°C	20	10	0	-10	-20	-30	-40
kW ¹	1	1	0.98	0.75	0.53	0.27	0.13
Refrigerant stage 1							
Refrigerant	R449A						
Filling weight g	190						
Global Warming Potential for R449A	1397						
Carbon dioxide equivalent t	0.26543						

¹ Performance specifications measured in accordance with DIN 12876. Cooling capacities up to 20 °C measured with ethanol; over 20 °C with thermal oil unless otherwise specified. Performance specifications apply at an ambient temperature of 20 °C. Performance values may differ with other bath fluids.

Technical data

Available voltage versions		Cooling	
Order No.	9 012 727	Cooling of compressor	1-stage Water
Available voltage versions:		Cooling water pressure max. psi	87
9012727.13	230V/60Hz (Nema N6-20 Plug) (R449A)	Recommended cooling water properties	
9012727.03.chn	230V/50Hz (CN Plug) (R449A)	Cooling water temperature range °C	30
9012727.04	230V/50Hz (UK Plug Type BS1363A) (R449A)	Cooling water difference pressure psi	4.4
9012727.05	230V/50Hz (CH Plug Type SEV 1011) (R449A)	Cooling water consumption l/min	1.1
9012727.02	115V/60Hz (Nema N5-20 Plug) (R449A)		
9012727.03	230V/50Hz (Schuko Plug - CEE 7/4 Plug Type F) (R449A)		
9012727.12	200V/50-60Hz (Nema N6-20 Plug) (R449A)		
Bath		Other	
Bath tank	Stainless steel	Classification	Classification III (FL)
Bath cover	integrated	IP Code	IP 21
Usable bath opening in. (W x L / D)	7.1 x 5.1 / 5.9	Pump function	Pressure Pump
		Pump type	Immersion Pump
Electronics		Dimensions and volumes	
Interfaces	USB	Weight lbs	113.5
Temperature control	PID1	Barbed fittings inner diameter mm	8/12 mm
Absolute temperature calibration	1 Point Calibration	Dimensions in. (W x L x H)	16.5 x 19.3 x 29.1
Temperature display	LED	Filling volume l	5 ... 7.5
Temperature setting	Keypad	Pump connections	M16x1 male
Temperature values		Included in delivery	
Setting the resolution of the temperature display °C	0.1	2 Barbed fittings for tubing 8 and 12 mm ID. (Pump connections M16x1 male)	
Working temperature range °C	-40 ... +150		
Temperature stability °C	±0.03		

Ambient temperature °C	+5 ... +40
Setting the resolution of the temperature display °C	0.01 ... 0.1

All Benefits



Brilliant.
Very bright display makes it easy to read even from a distance.



Switch on. And off you go.
Intelligent operating concept. Ready for operation with just a few quick and easy steps.



Timer. Integrated.
CORIO circulators include an integrated timer function. When the set time has elapsed, a signal sounds and the device switches off. Setting range: 0 ... 999 minutes.



Everything at the front.
All operating controls and safety functions are accessed easily and comfortably from the front.



Exact.
You can rely on it. PID1 control and 'Active Cooling Control' make the new CORIO precise and perfect.



Locked in.
The lockable power plug guarantees safe connection. More process safety.



Connection. Easy.
Inclined pump connections (M16x1) facilitate the connection of applications. Each unit includes 2 barbed fittings of 8/12 mm diameter each.



Early warning system for low liquid level
Maximum safety for applications, optical and audible alarm, allows user to refill bath fluid before the unit shuts down



Connectivity.
Remote control made easy. CORIO CD circulators feature a USB connection.



100% Checked.
100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.



ATC.
Absolute Temperature Calibration, 1-point calibration (CD).



Safety.
CORIO CD and CP comply with Class III (FL) according to DIN 12876-1 and switches off automatically in case of high temperature or low liquid level alarm.



Satisfied customers.
11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.



Services 24/7.
Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at www.julabo.com.



Quick start.
Individual JULABO consultation and comprehensive manuals at your disposal.



Quick support
If an error occurs, the integrated Black-Box function permits fast diagnosis by the JULABO service team