
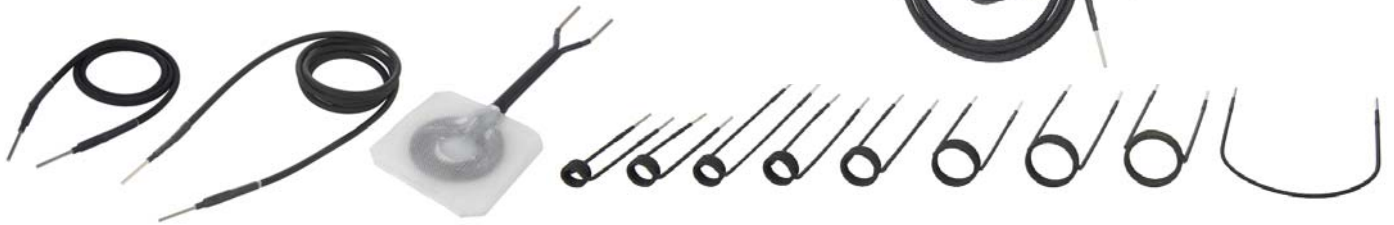


TECHNICAL DATA - iDuctor 1, handheld

| | |
|--|------------------|
|  | |
| Type BETEX | iDuctor 1 |
| Voltage/Amp/Hz | 230V/6A, 50/60Hz |
| Power | 1200W |
| Thermal protection | yes |
| Error code | yes |
| Cooling fan | yes |
| Microprocessor controlled, automatic power control in case of overload or overheating. | yes |
| LED lighting | yes |



| Inductors | | | | | | |
|--------------------|----------------|------------------------|----------------------|------------|-----------|------------------------|
| Article | Article number | Conductor thickness mm | Internal diameter mm | Winding mm | Length mm | Temperature insulation |
| Inductor 1.1 mtr | 231202 | 3,5 | - | - | 1100 | 650°C |
| Inductor 2.0 mtr | 231203 | 3,5 | - | - | 2000 | 650°C |
| IDpad | 231205 | 3,5 | - | - | - | 250°C |
| Inductor Set 9 pc. | 231204 | 3,5 | * | * | * | 250°C |
| Spareparts * | | | | | | |
| Set 9 pc. | | | | | | |
| M30 | - | 3,5 | 52 | 3,5 | 240 | 250°C |
| M24 | - | 3,5 | 47 | 3,5 | 240 | 250°C |
| M20 | - | 3,5 | 40 | 3,5 | 200 | 250°C |
| M16 | - | 3,5 | 32 | 3,5 | 200 | 250°C |
| M12 | - | 3,5 | 26 | 3,5 | 200 | 250°C |
| M10 | - | 3,5 | 23 | 3,5 | 250 | 250°C |
| M10 | - | 3,5 | 23 | 3,5 | 150 | 250°C |
| M08 | - | 3,5 | 18 | 3,5 | 150 | 250°C |
| Ucoil | - | 3,5 | 160 | 0,5 | 600 | 250°C |

