

ADAPTER 1.85/F-SMA/F 27 GHZ

SM3950

SPECIFICATIONS


ELECTRICAL
 IMPEDANCE: 50 OHMS
 VSWR 1.2:1 MAX @ 27 GHZ
 FREQUENCY: 0-27 GHZ

MECHANICAL
 500 CYCLES MIN


MATERIALS:
 BODY: PASS. STAINLESS STEEL
 CENTER CONTACT: BeCu per ASTM-B-196
 CONTACT PLATING: Au per MIL-G-45204
 DIELECTRIC: PTFE

ENVIRONMENTAL
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202
 TEMPERATURE: -65 DEG C TO +85 DEG C

ROHS COMPLIANT

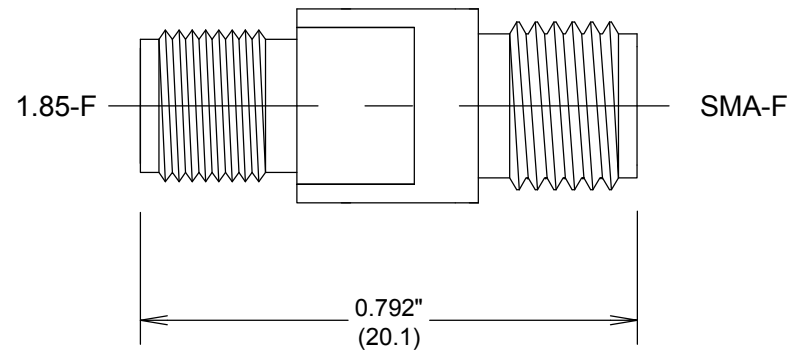

MEASUREMENTS BELOW ARE TYPICAL

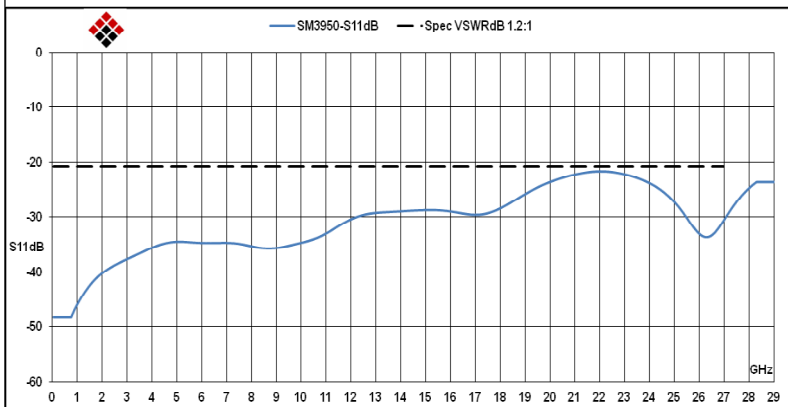

ALL DIMENSIONS IN inches(mm) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

ADAPTER 1.85/F-SMA/F 27 GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM3950	--
SCALE			SHEET