



UMCX 2.5 Plug to UMCX 2.5 Plug Cable 0.81mm Coax and RoHS Compliant

Fairview Microwave's UMCX 2.5 (also known as 2.5mm UMCX) ultra-miniature cable assemblies have a mate connection height of 2.5mm. They are constructed using flexible micro-coax cable and are comparable in design to Hirose U.FL®, IPEX MHF® as well other UMCX connector and cable manufactures. Fairview's other UMCX 2.1, WMCX and HMCX32 1.2 connectors are also available for use on our 0.81mm in-series micro-coax jumpers. These UMCX 2.5 are available in the following coax types; 0.81mm, 1.13mm, 1.37mm, RG178 and RG178-DS.

With operational frequencies up to 6 GHz, these UMCX cables are perfectly suited for wireless communications such as Wi-Fi, Bluetooth, GPS, ZigBee and LTE. These cables offer a small form factor, flexible coax and provide a low profile RF connection perfect for board-to-board connectivity. Fairview's UMCX 2.5 cable assemblies are available from stock in standard lengths and will ship same-day they are ordered. Custom lengths are also available upon request with slightly longer lead times.

Electrical Specifications

Frequency Range DC to 6 GHz Impedance 50 Ohms 1.55:1

Performance by Frequency

Description	F1	F2	F3	F4	F5
Frequency	250 MHz	500 MHz	1000 MHz	2.5 GHz	6 GHz
VSWR	1.4:1	1.4:1	1.4:1	1.4:1	1.55:1
Return Loss (dB)	15.56	15.56	15.56	15.56	13.32
Insertion Loss (dB/ft)	0.25	0.48	0.95	1.6	2.59
(dB/m)	0.82	1.57	3.12	5.25	8.5

Mechanical Specifications

Temperature

Temperature Operating Range -55 to +125 deg C

Cable

Description	Cable		
Cable Type	0.81mm		
Inner Conductor Type	Stranded		
Cable Inner Conductor	Copper, Silver		
No of Shields	1		
Cable Outer Conductor	Tinned Copper		
Dielectric Type	FEP		
Jacket Material	FEP		
Jacket Diameter	0.032 in [0.81 mm]		



Configuration:

- UMCX 2.5 Plug
- UMCX 2.5 Plug
- 0.81mm

Features:

- 2.5mm mated assembly height
- Operate from DC to 6 GHz
- 100% RF and Continuity tested
- Compatible with Hirose U.FL and IPEX MHF products
- Small foot print with easy snap on/off mating

Applications:

- · Wireless LAN, Mini PCI
- Mobile Antenna/GPS/Radio Systems
- PDA/PCS/Cellular Handset applications
- Wireless Communications systems (LAN, GSM, PCS, WCDMA, UMTS)

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Connectors

Description	Connector 1	Connector 2	
Туре	UMCX 2.5 Plug	UMCX 2.5 Plug	
Configuration	Straight	Straight	

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant Yes

Notes:

• Values at +25 °C, sea level



Example: FMCA1059-12 = 12 inches long cable FMCA1059-100cm = 100 cm long cable

UMCX 2.5 Plug to UMCX 2.5 Plug Cable 0.81mm Coax and RoHS Compliant from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: UMCX 2.5 Plug to UMCX 2.5 Plug Cable 0.81mm Coax and RoHS Compliant FMCA1059

URL: http://www.fairviewmicrowave.com/umcx-2.5-plug-umcx-2.5-plug-cable-0.81mm-coax-fmca1059-p.aspx


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2015





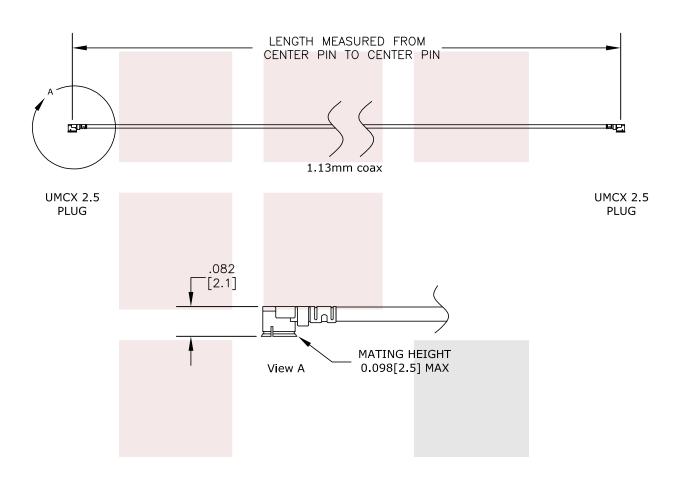

UMCX connectors are similar to U.FL*
*U.FL is a Registered Trademark of
Hirose Electronic Group

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].				
UMCX 2.5 Plug to UMCX 2.5 Plug Cable 0.81mm Coax	DWG NO FMCA1059		C.F	CAGE CODE 3FKR5	
and RoHS Compliant	CAD FILE 120814	SHEET	SCALE N	N/A SIZE	A 150