


LED830L



### Description

The LED830L is an AlGaAs LED mounted in a hermetically sealed TO-18 package with a spherical glass lens. It is designed for a relatively narrow viewing angle.

### Specifications

| Absolute Max Ratings                |               |         |        |
|-------------------------------------|---------------|---------|--------|
| Specification                       | Max           |         |        |
| Reverse Voltage                     | 5 V           |         |        |
| DC Forward Current                  | 75 mA         |         |        |
| Pulsed Forward Current <sup>a</sup> | 100 mA        |         |        |
| Operating Case Temperature          | -30 to 80 °C  |         |        |
| Storage Temperature                 | -30 to 100 °C |         |        |
| Specifications <sup>b</sup>         |               |         |        |
|                                     | Min           | Typical | Max    |
| Operating Current (Continuous)      | -             | 50 mA   | 75 mA  |
| Forward Voltage at 50 mA            | -             | 1.6 V   | 1.9 V  |
| Optical Output Power at 50 mA       | -             | 22 mW   | -      |
| Viewing Half Angle                  | -             | 12°     | -      |
| Peak Wavelength                     | 810 nm        | 830 nm  | 850 nm |
| Bandwidth (FWHM)                    | -             | 32 nm   | -      |

a. Pulsed Forward Current Condition: Duty Cycle = 1% and Pulse Width = 10  $\mu$ s.

b. Unless otherwise specified, all specifications are for operation at 25 °C.






| Soldering Specifications |                                                                                                                          |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------|
|                          | Conditions                                                                                                               |
| Dip Soldering            | Pre-Heat Backside of PCB at 90 °C Maximum for 60 Seconds or Less;<br>Solder Bath at 250 °C Maximum for 5 Seconds or Less |
| Hand Soldering           | Soldering Iron Tip at 250 °C Maximum for 3 Seconds or Less                                                               |

| Cleaning Solvents |               |                   |          |         |                   |     |
|-------------------|---------------|-------------------|----------|---------|-------------------|-----|
| Solvent           | Ethyl Alcohol | Isopropyl Alcohol | Propanol | Acetone | Trichloroethylene | MKS |
| Approved          | Yes           | Yes               | Yes      | Yes     | No                | No  |

May 24, 2019


QTN021725-S01, Rev B

## Typical Performance Plots

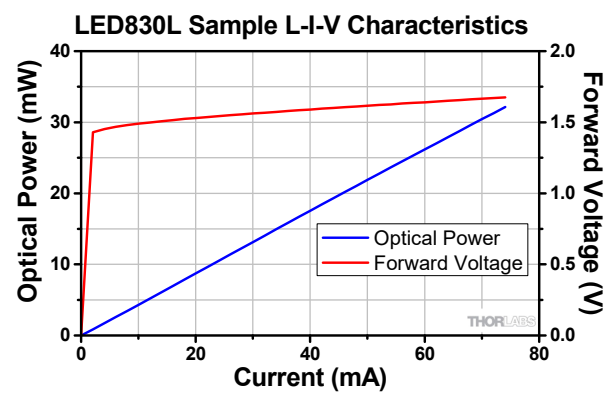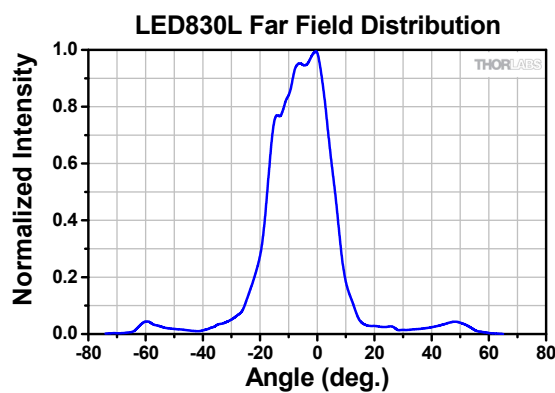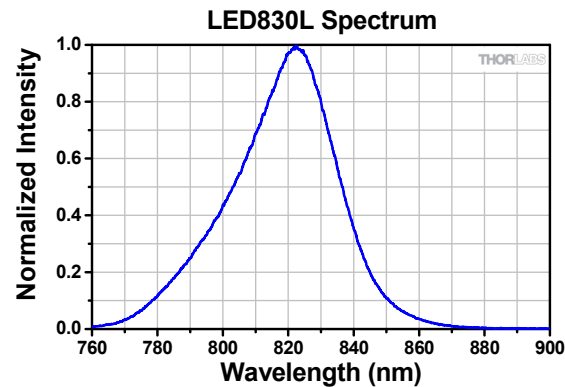

These measurements were taken at a case temperature of 25 °C. The output spectrum and radiation distribution were measured with an operating current of 50 mA.

## Drawing

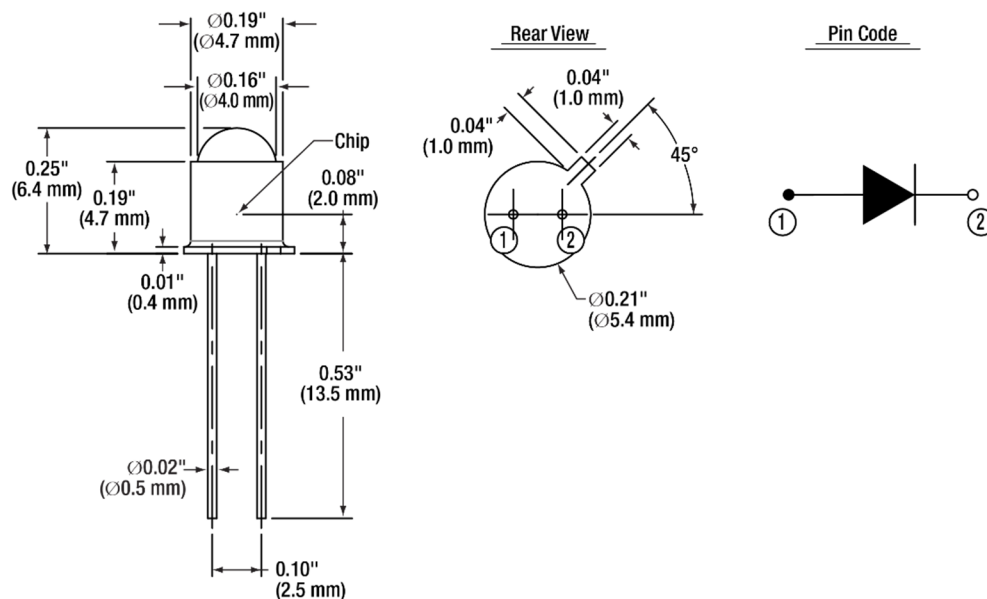

## ***Precautions and Warranty Information***

---

These products are ESD (electro static discharge) sensitive and as a result are not covered under warranty. In order to ensure the proper functioning of an LED care must be given to maintain the highest standards of compliance to the maximum electrical specifications when handling such devices. The LEDs are particularly sensitive to any voltage that exceeds the absolute maximum ratings of the product. Any applied voltage in excess of the maximum specification will cause damage and possible complete failure to the product. The user must use handling procedures that prevent any electro static discharges or other voltage surges when handling or using these devices.