

**LED1700P**

### Description


The LED1700P emits light with a spectral output centered at 1750 nm. This LED is composed of heterostructures (HS) grown on a GaSb substrate. The diode is in a TO-18R Parabolic Reflector package.

### Specifications


It is recommended that this diode be used in a quasi-CW or pulsed regime (see diagram below). The operating and storage temperature range is from 5 °C to 90 °C.



Quasi-CW

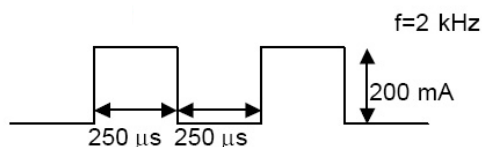

Pulsed

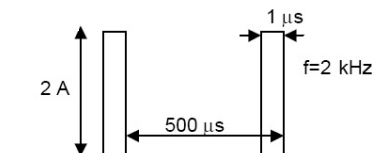


Optical Specifications	
	Typical
Center Wavelength	1750 nm $\pm$ 50 nm
FWHM	150 nm
Optical Power (Minimum/Typical) @ 200 mA qCW	0.8 mW/1.2 mW
Optical Power Pulsed Mode @ 1A 30.0 mW	30.0 mW
Switching Time, ns	30 ns

Soldering Specifications	
	Conditions
Manual Soldering	295 °C $\pm$ 5 °C , for less than 3 seconds
Wave Soldering	260 °C $\pm$ 5 °C , for less than 5 seconds
Reflow Soldering	Preheating: 70 °C to 80 °C , for 30 seconds Soldering: 245 °C $\pm$ 5 °C , for less than 5 seconds

Cleaning Solvents							
Solvent	Ethyl Alcohol	Isopropyl Alcohol	Propanol	Acetone	Chloroform	Trichloroethylene	MKS
Approved	Yes	Yes	Yes	No	No	No	No

## Typical Spectral Intensity Distribution

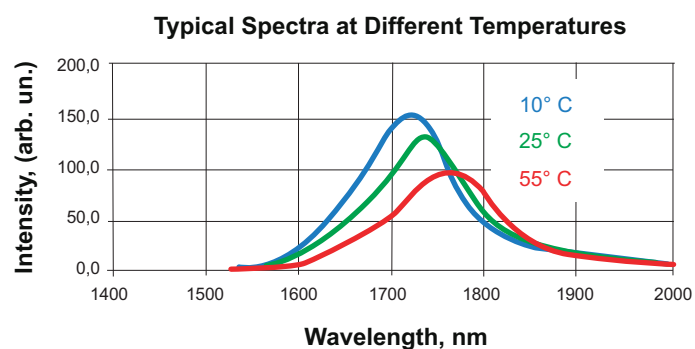

## Drawing

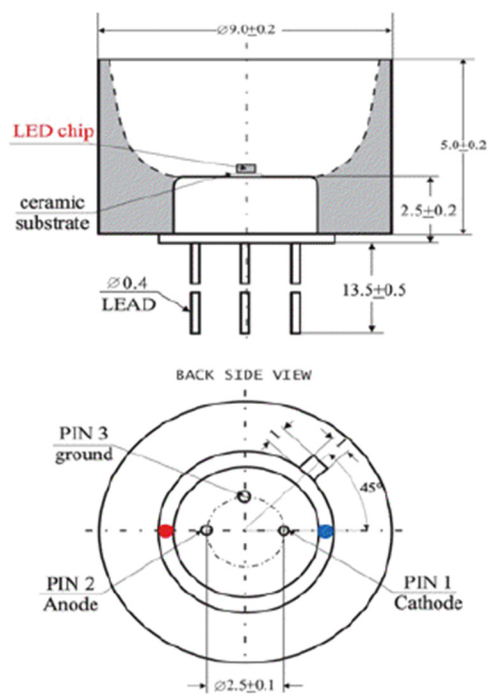


Figure 1: LED1700P. All Dimensions in mm

## ***Precautions and Warranty Information***

---

These products are ESD (electro static discharge) sensitive and as a result are not covered under warranty. In order to ensure the proper functioning of an LED care must be given to maintain the highest standards of compliance to the maximum electrical specifications when handling such devices. The LEDs are particularly sensitive to any voltage that exceeds the absolute maximum ratings of the product. Any applied voltage in excess of the maximum specification will cause damage and possible complete failure to the product. The user must use handling procedures that prevent any electro static discharges or other voltage surges when handling or using these devices.