

# U5850 Series True/R Thermal Imagers



Notice for EU Customers: Keysight will discontinue the U585xA series True/R Thermal Imagers for European (EU) countries due to RoHS non-compliance on April 1, 2021. The last day to place order for this product is March 31, 2021. Keysight will continue to provide world-class support for this product for the standard period of 5 years.

# Introduction

Find potential problems faster with the higher resolution and affordability of our True/R Series of thermal imagers. Only from Keysight Technologies, Inc. can you get a 320 x 240 fine resolution thermal imager with image logging and trending capability at a lower price than the typical 320 x 240 resolution thermal imager.

- Identify abnormalities faster with four times more in-camera fine resolution
- Stream, record and playback thermal images up to 8 frames per second with True/R Analysis and Reporting tool.
- Monitor temperature changes through image logging and temperature trending capabilities
- Ability to focus on objects as close as 10 cm away
- Compact, lightweight, ergonomic
- High temperature range (up to 1200 °C)
- Easy-to-use customizable color palette
- Configurable quick access buttons to easily change settings with one hand

## Today's hottest imagers



Confidently detect problems with four times better resolution


ECN 2015 Impact Award Winner  
Cooling and Thermal Management



# Detect Abnormalities Sooner with Higher Resolution Thermal Images Within the Camera

## Get more details with fine resolution

Fine resolution is a technology that restores the details originally inherent to the object while enhancing the resolution, at the same time minimizing fuzziness and noise. It is accomplished by performing sophisticated calculations on continuous multi-frames of the image – evaluated for misalignment caused mainly by hand tremor. The firmware then detects and corrects the information between images through one feature pixel.

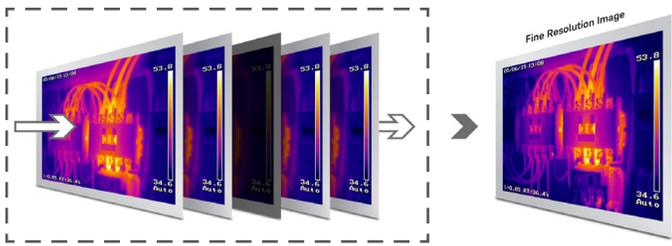

Continuous multi-frames of low resolution images

Four times more resolution, noise eliminated

With fine resolution,

- Get an effective 320 x 240 pixels of radiometric JPEG IR image which is clearer and sharper.
- See fine details on objects as close as 10 cm, especially when measuring temperature on small components which are close to each other.
- With four times digital zoom, magnify a thermal image of a far-away object to quickly identify anomalies and to reveal even finer details.
- These are essential for industrial, building inspection, electronics, as well as medical research.

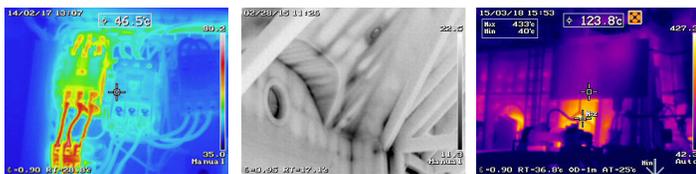


Figure 1. Samples of IR images

## Image logging and temperature trending

Image logging is a capability that enable users to monitor the performance of their object or DUT at a specified interval. Users performing temperature profiling of their design or performing equipment failure analysis will find this feature useful, especially with the easy to use TrueIR Analysis and Reporting tool.

With this PC software, users can import, analyze, edit and present their thermal images to their clients swiftly.


## Stream, record, playback and analyze thermal images

With the enhanced TrueIR Analysis and Reporting Tool, users are able to stream live thermal images from a PC. This feature is especially useful for monitoring DUT's performance and perform equipment failure analysis. Now you can easily record thermal image up to 8 frames per second and simply playback the recorded video to perform detailed analysis and generate report.




## TrueIR Analysis and Reporting Tool

Download from [www.keysight.com/find/TrueIR\\_ART](http://www.keysight.com/find/TrueIR_ART)

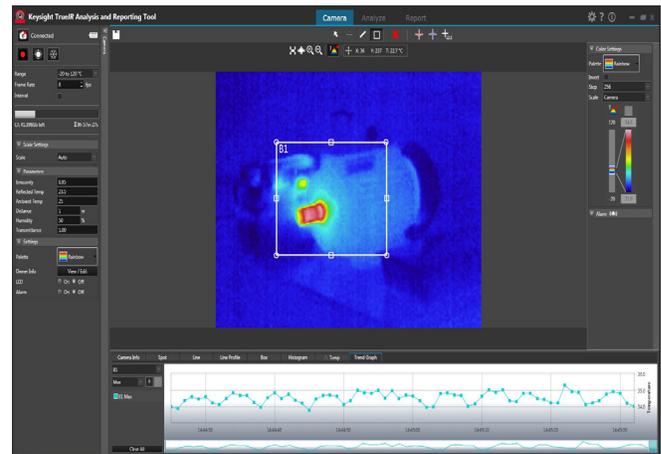


Stream and record video up to 8 frames/s

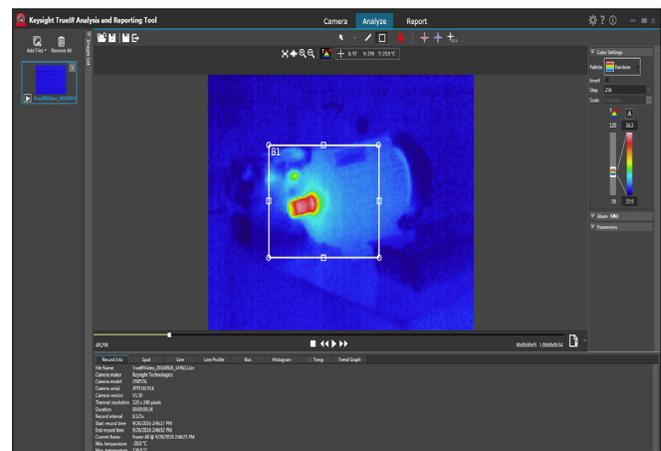

Playback video and perform detailed analysis

# Front and Back Panels

## Front panel



## Back panel



## Specification

Specifications are warranted in the temperature range of 0 to 40 °C and after 2 minutes of power up, unless otherwise noted. Supplemental characteristics – which are not warranted, but are descriptions of performance – are determined either by design or testing.

### Performance specifications

Parameter	Specification		
	U5855A	U5856A	U5857A
<b>Basic performance</b>			
Temperature measurement range	-20 ~ 350 °C	-20 ~ 650 °C	-20 ~ 1200 °C
– Range 1	-20 to 120 °C	-20 to 120 °C	-20 to 120 °C
– Range 2	0 to 350 °C	23 to 650 °C <sup>1</sup>	0 to 350 °C
– Range 3	NA	NA	250 to 1200 °C <sup>2</sup>
Thermal sensitivity			
– Range 1	0.07 °C (at 30 °C)	0.07 °C (at 30 °C)	0.07 °C (at 30 °C)
– Range 2	0.1 °C (at 30 °C)	0.5 °C (at 30 °C)	0.1 °C (at 30 °C)
– Range 3	NA	NA	0.5 °C (at 250 °C)
Accuracy <sup>3</sup>	± 2 °C or ± 2% (whichever is greater) At 0 ~ 40 °C ambient temperature		
Detector type	Uncooled focal plane array (α-Si)		
Detector resolution	160 × 120		
Fine resolution (in-camera)	320 × 240 (IR pixels)		
Spectral range	8 to 14 μm		
Frame rate	9 Hz		
Field of view (FOV)	28° (H) × 21° (V)		
Spatial resolution (IFOV)	3.1 mrad; 2.1 mrad (with fine resolution)		
Focal distance	10 cm to infinity		
Focus mechanism	Manual focus		
<b>Image processing and enhancement</b>			
Correction parameters	Emissivity <ε>, reflected temperature <RT>, object distance <OD>, ambient temperature <AT>, relative humidity <Hum>, transmission <T>		
Emissivity correction	0.1 to 1.0 Predefined emissivity table		
Digital zoom	Zoom ratio: 4x continuous		
Color palette - Different color palette for different models	Rainbow, Iron, Hot Iron, Iris, Grayscale, Inverted Grayscale, Custom	Rainbow, Lava, Iron, Hot Iron, Iris, Olive, Medical, Grayscale, Inverted Grayscale, Custom	Rainbow, Lava, Iron, Hot Iron, Iris, Olive, Medical, Grayscale, Inverted Grayscale, Custom
Camera mode	IR image, visible image, picture in picture, blend		
<b>Measurements and alarm</b>			
Measurements	Center spot, 3x movable spots, max/min tracking, delta temperature, 3x movable boxes (with min/max/avg)		
Color alarm	High/low temperature in all areas		
– Alarm zones	Above/below/inside/outside		
– Backgrounds	Hot white/Hot black		

1. Lower limit temperature at 0 °C, guaranteed lower temperature at 23 °C.
2. Lower limit temperature at 0 °C, guaranteed lower temperature at 250 °C
3. Minimum distance with accuracy, 10 cm to 50 cm: ± 4 °C or ± 4%.

## Supplemental characteristics

Parameter	Specification
Storage device	Supports up to 32 GB SDHC memory card with class 4 and above
Image storage format	
– Thermal Image	Radiometric JPEG
– Visible Image	JPEG
Image logging	Logs IR, visible or fusion images at a defined interval (7 to 3600 seconds)
State storage memory	Three user-configurable stored states
Tagging/annotation	3 photo tags, note tag, note tag from template (downloadable from the Keysight Technologies, Inc. web site)
I/O	USB 2.0 mass storage
	NTSC/PAL via video RCA cable
Language	English, French, German, Italian, Japanese, Korean, Portuguese, Russian, Spanish, Simplified Chinese, Traditional Chinese
Built-in quick start tutorial	Available

## Product characteristics

Parameter	Specification
Power supply	
– Power adapter	Line voltage range: 50/60 Hz, 100 – 240 VAC (Auto/Universal voltage), 1.2 A
	MAINS supply voltage fluctuations not to exceed $\pm 10\%$ of the nominal voltage
	Output voltage: 12 VDC, 3 A
	Installation Category I (Isolated ELV supply source – connected to MAINS through an AC/DC power adapter)
– Battery	Li-Ion rechargeable battery, 7.4 VDC, 2500 mAh
	Operating time: 4 hours
Display	3.5" TFT
Visible camera	3.1 MP
Built-in led torch	Available
Laser pointer	Class 2
Warm-up time	2 minutes
Operating environment	
– Temperature	$-15\text{ }^{\circ}\text{C}$ to $50\text{ }^{\circ}\text{C}$
– Humidity	Up to 95% RH at $40\text{ }^{\circ}\text{C}$
Storage compliance	
– Temperature	$-40\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$
– Humidity	Up to 95% RH at $40\text{ }^{\circ}\text{C}$
– Altitude	Up to 2000 m
– Pollution degree	2
Safety compliance	Laser safety: IEC 60825-1/EN 60825-1 (Laser Class 2)
	IEC 61010-1/EN 61010-1
EMC compliance	IEC 61326-1/EN61326-1
	CISPR11/EN55011, Group 1 Class A
	Canada: ICES/NMB-001: Issue 4, June 2006
	Australia/New Zealand: AS/NZS CISPR 11
Shock	Tested to IEC 60068-2-27 Ed. 3.0
Vibration	Tested to IEC 60068-2-6
Tripod mount thread	ISO 1222:2010 Standard screw thread, 1/4 - 20 UNC
Drop test	2 m
Protection class	2
IP rating	IP 54
Dimensions (W × H × D)	95 × 250 × 85 mm
Weight	0.746 kg (with battery)
Calibration cycle	1 year

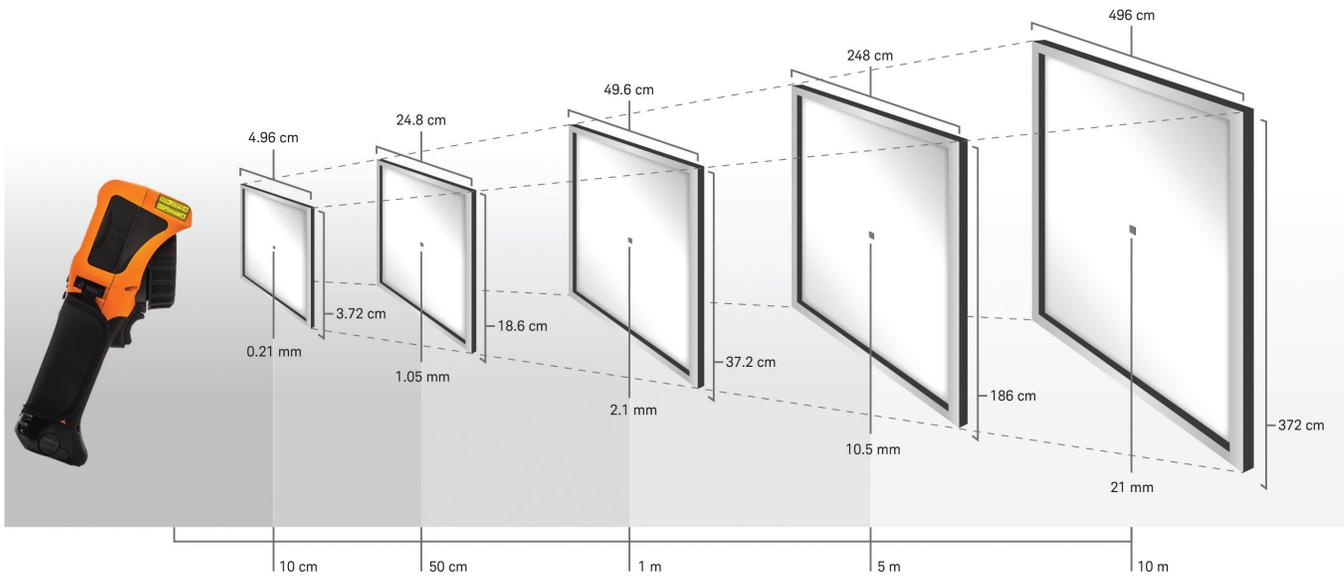


Figure 2. Relationship between the Field of View (FOV) and the distance to target

## Ordering Information

Model number	Description
U5855A	True/R thermal imager, 350 degree Celsius
U5856A	True/R thermal imager, 650 degree Celsius
U5857A	True/R thermal imager, 1200 degree Celsius
Option number	Description
U5855A-100	2-bay charger and additional battery for U5855A
U5856A-100	2-bay charger and additional battery for U5856A
U5857A-100	2-bay charger and additional battery for U5857A

Standard shipped accessories
– Power adapter with power cord
– Rechargeable Li-Ion battery
– SD memory card
– Video RCA to RCA interface cable, 2 m
– USB standard-A to mini type-B interface cable, 1 m
– Hand strap
– Rugged, hard carrying case
– Quick start guide
– Certificate of calibration



U5855A

U5856A

U5857A

## Optional accessories

U5751A Power adapter (with power cord)



U5752A Rechargeable Li-Ion battery



U5753A External battery charger (2-bay)



U5761A Video RCA to RCA interface cable, 2 m



U5762A USB standard-A to mini type-B interface cable, 1 m



U5771A Rugged carrying case, hard



U5772A Hand strap, adjustable for right-handed and left-handed use



Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

