

Automatic Vertical Pallet Strapping Machine



■ Strapping with Arch Sword

The arch sword penetrates the pallet void and straps the product to the pallet.


■ Holder for Pooled Strap

Strap holder rollers maintain even strap tension during the reversing cycle, a useful feature on large arch machines.

RQ-8YAO

■ Consistent & High Tension

The RQ-8YAO features the proven and reliable RQ-8 Strapping Head with a latest DC Brushless Motor for the tension system to maintain consistent and high tension for strapping pallets.

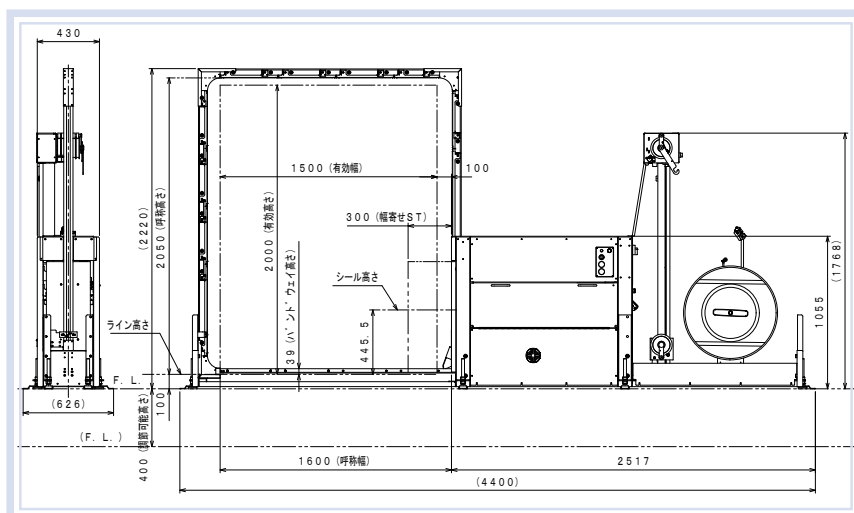

Standard Specifications

Dimensions	Width	4398 mm	173-1/8 in.
	Depth	590 mm	23-1/4 in.
	Height	2220 mm (if conveyor height is 100 mm)	87-3/8 in. (if conveyor height is 4 in.)
Conveyor Height		100 - 500 mm	4 - 20 in.
Packing Ability	One Cycle Packing	Strapping by opening and closing arch	
	Max Strap Tension	1000 N	225 lbs.
Strap	Joint / Description	heat seal / polypropylene and PET	
	Width	9 - 15.5 mm	3/8 - 5/8 in.
	Coil	OD 600 mm x ID 400 mm	16 x 6 coils; max OD 23-5/8 in.
Power Supply		220, 400, 480V Three Phase 50/60 Hz	

Dimensions and specifications are subject to change without notice.
Modification rights reserved.

© 2020 Strapack Corporation

DISTRIBUTED BY:



ISO 9001 and 14001 Certified

STRAPACK CORPORATION
8-16-6 Ginza, Chuo-ku, Tokyo, 104-0061, JAPAN
Phone 81-3-6278-1806 Fax. 81-3-6278-1807
(URL) <http://www.strapack.com> (E-mail) info@strapack.com
STRAPACK INC.
33508 Central Avenue, Union City, CA 94587-2097 U.S.A.
Phone 1-510-475-6000 Fax. 1-510-475-6090
STRAPACK, N.V./S.A.
Uilenbaan 200, B-2160 Wommelgem, BELGIUM
Phone 32-(0)3-355-1520 Fax. 32-(0)3-355-1521